




## DELTA LED PETROL STATION LIGHT

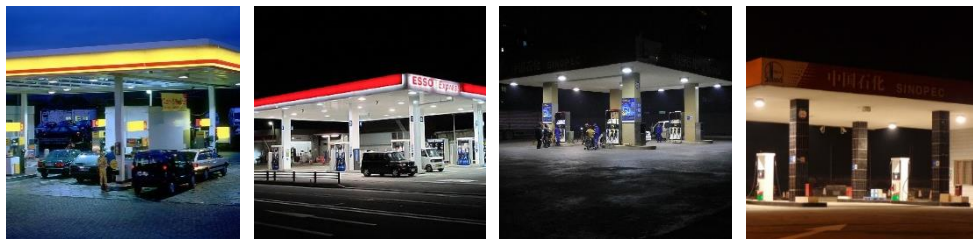

### Excellent Heat Dissipation

The specially designed heat sink does not let dust easily collect, while also allowing more air to flow through it, providing for greater heat dissipation and, in turn, improving the performance of a long-lasting, durable luminaire.

### IP65

#### High Durability

A robust, protective design gives this luminaire an IP of 65 and the ability to handle harsh environments.



### Optimal Optical Design

The unique and scientific combination design of lens and diffuser used gives good quality and quantity of light, where you need it. With options of beam angles to choose from, these luminaires are ideal for a number of applications.



### Energy Saving

The combination of high-efficacy LED components with excellent whole system design has YOST LED lighting achieving energy savings of 40% - 60% compared with traditional lighting sources.



### Quality Core Component

Excellent luminaire design to the core: starting with the LED packages themselves. These luminaires only use high quality COB packages from CITEDLED - chipsets that have great quality and long life as backed by LM-80 and TM-21 reports. Quality inside the luminaires that shines on the outside.



### Motion Sensor

Optional motion sensor control to trigger the light to turn to full power when motion is detected, and operates at 20% consumption in inactive moments.



**Yost Inc.**

Authorized Distributor of U.S. Territories for


**SONARAY** LED

# DELTA LED PETROL STATION LIGHT




## Specification

Material: Aluminum  
 Appearance Color: Black on White  
 Driver: Built-in  
 Input Voltage: AC100-277V ~ 50/60Hz  
 Power Factor:  $\geq 0.9$   
 Operating Temperature:  $-25^{\circ}\text{C} \sim +45^{\circ}\text{C}$ ,  $-13^{\circ}\text{F} \sim +113^{\circ}\text{F}$   
 Lifetime:  $\geq 50,000$ hrs  
 Feature: Motion Detection with dimming

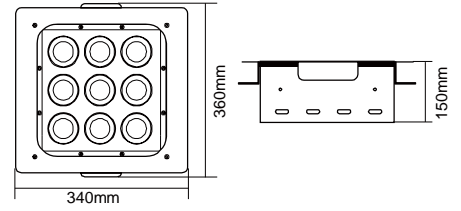

Color Temperature




Beam Angle



Model No.	Power (W)	Luminous Flux (lm)	Luminous Efficacy (lm/W)	Color Temperature (K)	CRI (Ra)	Beam Angle ( $^{\circ}$ )	Weight (kg/lb)
PT-1130	130	12090	93	5000	80	90	5.7/12.56

## Motion Sensor

Innovative motion sensor control trigger the light to turn to full power when motion is ever detected, and operates at 70% consumption in other non-operated intervals.

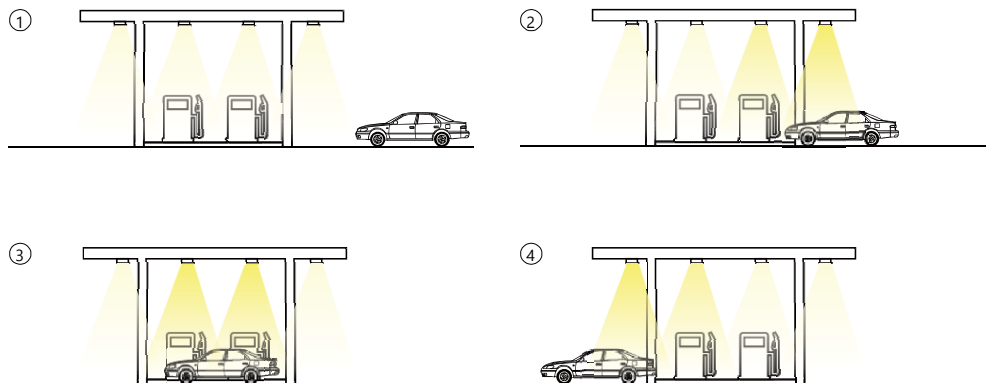

[www.yostledlighting.com](http://www.yostledlighting.com)

©Yost Inc.  
 Authorized Distributor of U.S. Territories for  
 Sonaray.

